



AMERICANFORGE&FOUNDRY™

FM APPROVED ROTARY FUEL PUMP

Model 8210

- For quick refueling of vehicles and equipment
- Ideal for outdoor use in extreme weather conditions
- Self priming operation with vacuum release and a flow of up to 10 gallons/min (38 liters/min)
- Delivers media with a head/lift up to 20'
- Pump handle rotates a high quality sintered powder metal 3-vane rotor inside a highly finished pumping chamber
- Graphite vanes are self-lubricating and non-wearing, and graphite seals allow the pump to be used with a wide variety of fluids including diesel with up to 15% Ethanol blend.
- Comes complete with 8' anti-static hose with non-sparking nozzle, nozzle holder, 2" bung adapter, flame arrestor, and telescopic suction tube with strainer.

Specifications:

Inlet/outlet: 3/4" NPT

Flow: 10 gal/min (38 liters/min)

Max fluid temp: 250° F (120° C)

Max viscosity: 2000 SSU

Suction tube: 18.2" to 34.5"


Anti-static hose: 8' x 3/4"

For use with 15 gallon (50 liter) to 55 gallon (205 liter) drums


Wetted components: cast iron, steel, graphite, paper, polypropylene

Use with gasoline, oil, diesel, bio-diesel, kerosene, Class I & II flammable liquids, Naptha, and alcohol


Do not use with water based media

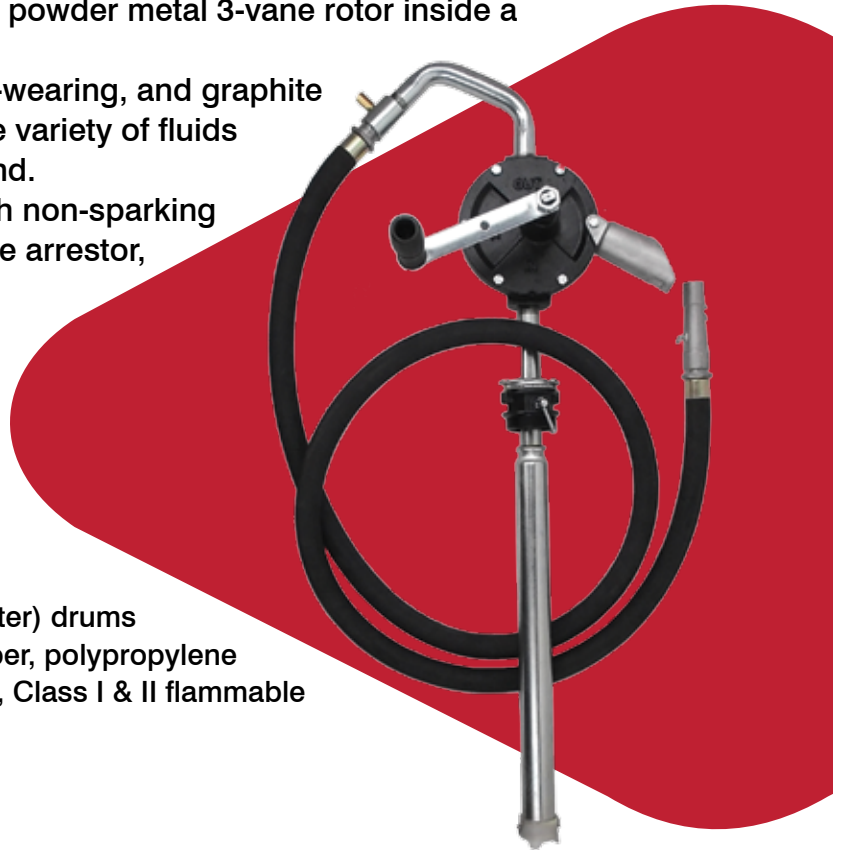

RELATED PRODUCTS

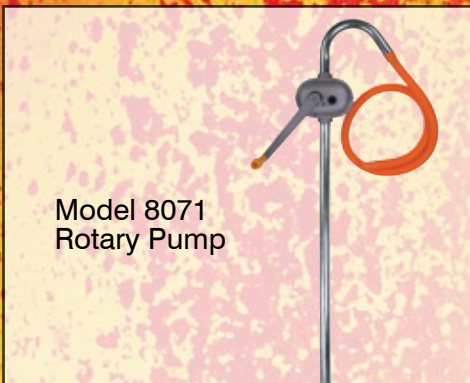

Model 8071
Rotary Pump

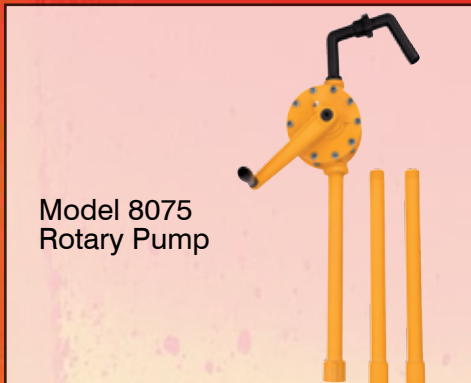

Model 8075
Rotary Pump



Model 8064
Chemical Pump