



## ROPE GRABS AND LIFELINES

### Lifelines

- All PeakWorks lifelines are certified to CSA Z259.2.5-2012 and meets or exceeds ANSI Z359.15 standards
- Lifelines are specially designed from rope made using high-strength polysteel
- Polysteel is an extruded co-polymer fibre that yields an extremely high-strength, lightweight rope with excellent resistance to acids and alkalis
- PeakWorks vertical lifelines are all 5/8" (16 mm) in diameter
- Minimum breaking strength 6,000 lb (27 kN)
- We offer a wide range of lengths with a variety of snap hook/carabiner options
- All PeakWorks lifelines have a back splice at the trailing end to prevent the rope grab from coming off the end of the lifeline




V84013XXX  
VL-1115-X



V84014XXX  
VL-1125-X



V84014XXX  
VL-1825-X

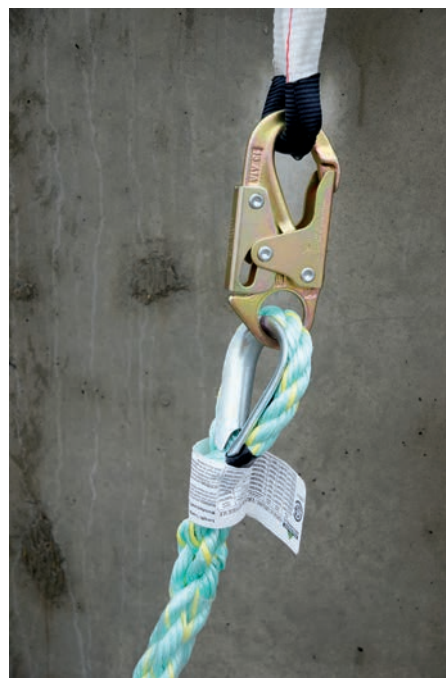

PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name	End Configuration	
				Anchor End	Trailing End
V84013XXX	<b>VL-1115-X</b>	25, 50, 100 (7.6, 15.2, 30.5 m)	Premium Vertical Lifeline, 5/8" (16 mm) Rope	Carabiner	Back Splice
V84014XXX	<b>VL-1125-X</b>	25, 50, 100 (7.6, 15.2, 30.5 m)	Premium Vertical Lifeline, 5/8" (16 mm) Rope	Snap Hook	Back Splice
V84084XXX	<b>VL-1825-X</b>	25, 50, 100 (7.6, 15.2, 30.5 m)	Standard Vertical Lifeline, 5/8" (16 mm) Rope	Snap Hook	Back Splice

Note: other lengths available as a special order.